


# DC115

## Datasheet

Applies to Part Numbers:

585000 / 585001

## Intellivox - DC115

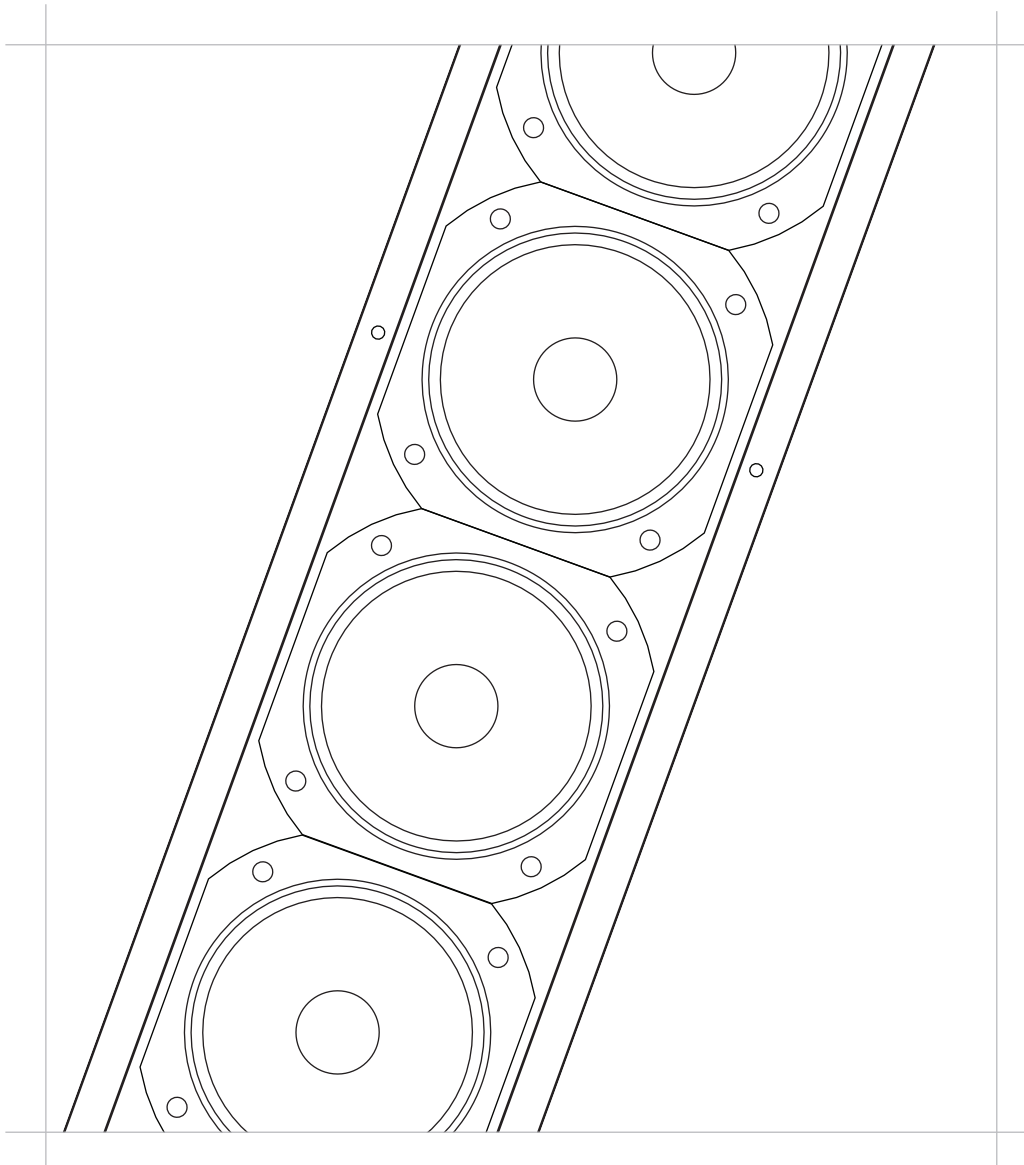

## User Notice:

- No part of this document including the software described in it may be reproduced, transmitted, transcribed, stored in a database system or translated without the express written permission of Duran Audio BV. Documentation kept by the end-user for backup purposes is excluded from the above mentioned.
- All products and corporate names mentioned in this document may be registered trademarks or copyrights of their respective companies. They are used here for indicative purposes only.
- The information contained in this document has been carefully checked for accuracy, however no guarantee is given with respect to the correctness. Duran Audio BV accepts no responsibility or liability for any errors or inaccuracies that may appear in this document or the products and/or software described in it.
- Specifications and information contained in this document are subject to change at any time without notice.

# Table of Contents

1. Architectural and engineering specifications .....	4-5
2. Specifications .....	6-7
3. Mechanical details .....	8-9
4. Optional Accessories .....	10
5. DSP block diagram .....	11

# 1. Architectural and engineering specifications

The unit shall be constructed as a line-array of six 4" full-range loudspeakers equipped with moisture resistant diaphragms and two coaxially mounted tweeters.

All signal processing functions, necessary to properly drive a directivity controlled line-array with electrical aiming properties, shall be implemented on-board in order to reduce the overhead costs related to external connections. The complete electronics shall be mounted on a chassis which is placed in a separated compartment at the front-side of the enclosure. Electronics shall consist of an audio input module, two input / eight output channel DSP section, eight power amplifiers with protection circuitry and a switched-mode power supply. Each power amplifier shall drive one loudspeaker.

The input section shall be transformer balanced. All necessary array signal processing shall be implemented in the digital domain by means of a 900MFLOPS 32bits DSP. The DSP shall realize appropriate output channel filters

and delays. Besides the aforementioned, the DSP shall be able to realize EQ, pre-delay, volume and autogain, and compression as required. The DSP software and coefficients shall reside in non-volatile memory in order to facilitate adaptations and software updates.

The control unit shall be equipped with a fully isolated RS-485 based full-duplex serial network interface. This control unit shall serve three main functions:

- Remote monitoring of parameters like status of the DSP, amplifiers and loads, external pilot tone, status of the ambient noise sensing microphone, chassis temperature, ambient noise level, ambient temperature, control for the input section etc.
- Remote control of beam parameters, volume and analog pre-gain, pre-delay, EQ, autogain configuration and surveillance related parameters.
- Updating DSP software and factory unit programming.

The audio signal shall be connected to a 6p male 5 mm pitch cage clamp connector (as WAGO series 231). The RS-485 signal shall be connected to a 5p cage clamp connector of the same type as specified above. The unit shall be equipped with a 3p male IEC mains supply connector. All connectors shall be grouped together on the electronics chassis and shall be accessible from the front and the rear of the unit.

The enclosure shall be constructed of steel finished with an epoxy coating. At the back side of the enclosure a total of two bracket attachment points shall be provided (located near the outer ends). The protective front shall consist of a perforated steel grill which can be clicked onto four snap-in studs mounted on the enclosure.

The complete loudspeaker unit shall meet the following criteria:

Typical frequency range of the complete array 130 - 20k Hz on axis (+/- 3 dB), max. SPL at 30 m of 85 dB<sub>SPL</sub> continuous and 88 dB<sub>SPL</sub> peak, adjustable nominal vertical opening angle of 15° to 40° (-6 dB), adjustable vertical aiming angle of -16° to +16°, fixed horizontal opening angle of 130° (-6 dB, averaged 1k to 4k Hz).

Dimensions are 1149 mm (45.2") H x 134 mm (5.3") W x 92 mm (3.6") D.

Weight 13 kg (28 lbs).

The loudspeaker unit shall be the AXYS® model Intellivox-DC115

## 2. Specifications

### Acoustical:<sup>1</sup>

Freq range <sup>2</sup>	- 4" loudspeaker - 10 mm tweeter - Complete array	: 230 - 10k Hz (+/-3 dB) : 6k - 20k Hz (+/-3 dB) : 130 - 20k Hz (+/-3 dB)
Max SPL <sup>3</sup>	- Continuous - Peak	: 85 dB <sub>SPL</sub> (A-weighted at 30 m) : 88 dB <sub>SPL</sub> (A-weighted at 30 m)
Coverage	- Horizontal (fixed) <sup>4</sup> - Vertical (adjustable) <sup>5</sup>  - Typical throw	: 130 deg (-6 dB, averaged 1k to 4k Hz) : opening angle : 15 to 40 deg : elevation (aiming) angle : -16 to 16 deg : focus distance : 2 to 40 m : 15 m
Dynamic range <sup>6</sup>		: >100 dB

### Electrical:

Input <sup>7</sup>	- Nominal level - Maximum level - Type - Impedance (balanced)	: 0 dBV (RMS, line input) : +19 dBV (peak, line input) : dual line input, transformer balanced : 6k8 Ω
DSP module	- Type - Memory - AD - DA conversion: - Auxilliary processor - Sample rate - Signal processing <sup>8</sup>	: floating point 900 MFLOPS 32 bits : 64 Mb SDRAM + 3 Mb non volatile : 24 bits sigma-delta 128 x oversampling : 200 nsec single cycle RISC : 48.8 kHz (default) : - 21 sec (pre-delay) + 2 x 10 sec (input channel delay) - equalizer and compensation filtering - compressor - volume - ambient noise level dependent gain adaptation ('fail-safe') - eight output filters + delay ringbuffers - dual input configuration
Control unit	- Network interface type  - Maximum number of units <sup>9</sup> - Remote surveillance         - Failure	: serial full-duplex RS-485, autoswitching 115k2, 57k6, 38k4, 19k2 baud, optically isolated : 126 units : - general status (DSP running, signal present etc.) - amplifier monitoring and load monitoring schemes - external pilot tone detection (20k - 30k Hz, level > -22 dBV) - built-in ambient noise microphone, override through external ambient mic - frost protection - fan control for optional external fan - thermal overload protection  : - internal hardware bypass circuit - failure relay (external connector, maskable conditions)
Power amps	- Type - Power - Protection	: PWM (class D) : 8 x 40 W <sub>rms</sub> (4 ohm) : - thermal shutdown if T <sub>junction</sub> > 150 °C - current limiting output stage

Connectors	- General type	: 5 mm pitch cage clamp (as WAGO series 231)
	- Audio inputs	: 6p male p1 = Line 1 +, p2 = Line 1 -, p3 = GND p4 = Line 2 +, p5 = Line 2 -, p6 = GND
	- RS-485 interface	: 5p male p1 = A, p2 = B, p3 = Z, p4 = Y, p5 = DGND
	- Ambient noise and temp sensor	: 5p female p1 = MIC, p2 = AGND, p3 = NTC, p4 = AGND, p5 = GND
	- Failure detect and fan control	: 5p female failure relay : p1 = COM, p2 = NO, p3 = NC optional fan : p4 = +24 V, p5 = -
	- Mains	: 3p IEC
PSU	- Mains voltage (+5/-10 %)¹⁰	: 230 or 115 V
	- Mains fuse(s)	: 1 x 6.3 A (slow type)
	- Power consumption¹¹	: 58 VA (idle) / 325 VA (full load)
	- Power factor	: 0.55 (idle) / 0.60 (full load)
	- Max mains inrush current	: 25 A short-time peak (@ 230 V)
	- Protection	: - thermal protection - output current limiting - under-voltage lock out

**General:**


Temperature range (ambient)¹²	: 0 to 40 °C (32 - 104 °F)
Transducers	: 6 x 4" full range : 2 x 10 mm ferrofluid cooled tweeter, coaxially mounted
Dimensions (H x W x D)¹³	: 1149 mm (45.2") x 134 mm (5.3") x 92 mm (3.6")
Default color	- Enclosure and grill : RAL 9010 (white) - Speaker baffle : RAL 9011 (black)
Weight	: 13 kg (28 lbs)
Standards	- Safety : IEC 60065, CB edition 7 - EMC : EN 55103 (pro audio and video equipment)
Certificates	: CE, CSA/UL, CCC, EK

**Notes:**

1. Measured outside under semi-anechoic 'full-space' conditions with typical filter and delay settings unless stated otherwise.
2. Single transducer data is determined from 1/3 octave averaged data measured on-axis. The frequency response of the complete array is depending on the actual signal processing parameters and air absorption (at larger distances). A typical bandwidth is specified for the complete array under 'full-space' radiation conditions.
3. Levels are valid for pink noise (100 to 20k Hz bandwidth) with a crest factor of 3 dB. Default EQ and minimum opening angle setting. 'Continuous' is the RMS level, 'Peak' is the absolute peak level, both determined at the onset of the output limiters.
4. Opening angle -6 dB, average value 1k - 4k Hz octave band.
5. Opening angle -6 dB, typical values, only valid in the far-field (d > approx. 5 m).
6. For this measurement the signals at all power amplifier outputs are summed together. Measured as the A-weighted difference (in dB) between the maximum rms level (with pink noise input signal) and the noise output (with no input signal present).
7. Specs valid for default dual input board. An optional input board (part number 381001) with 1x line level input and 1x 100V input is available.
8. Additional processing capabilities available.
9. Maximum number that can be connected to one RS-485 subnet, multiple subnets can be controlled by one host PC.
10. Mains voltage can be selected on the switched-mode power supply inside the unit.
11. Defined as the rms mains current multiplied by the rms mains voltage under normal operating conditions. 'Full load' figures are maximum values measured with a pulsating pink noise input signal.
12. Lower limit -15° C with frost protection and installed ambient temperature sensor (optional). Outdoor versions available upon request.
13. Depth of enclosure only, without mounting brackets.


Note: SPL values will vary depending upon opening angle, DDA should be used to verify SPL values for each individual installation.

### 3. Mechanical Details (part number 585000)

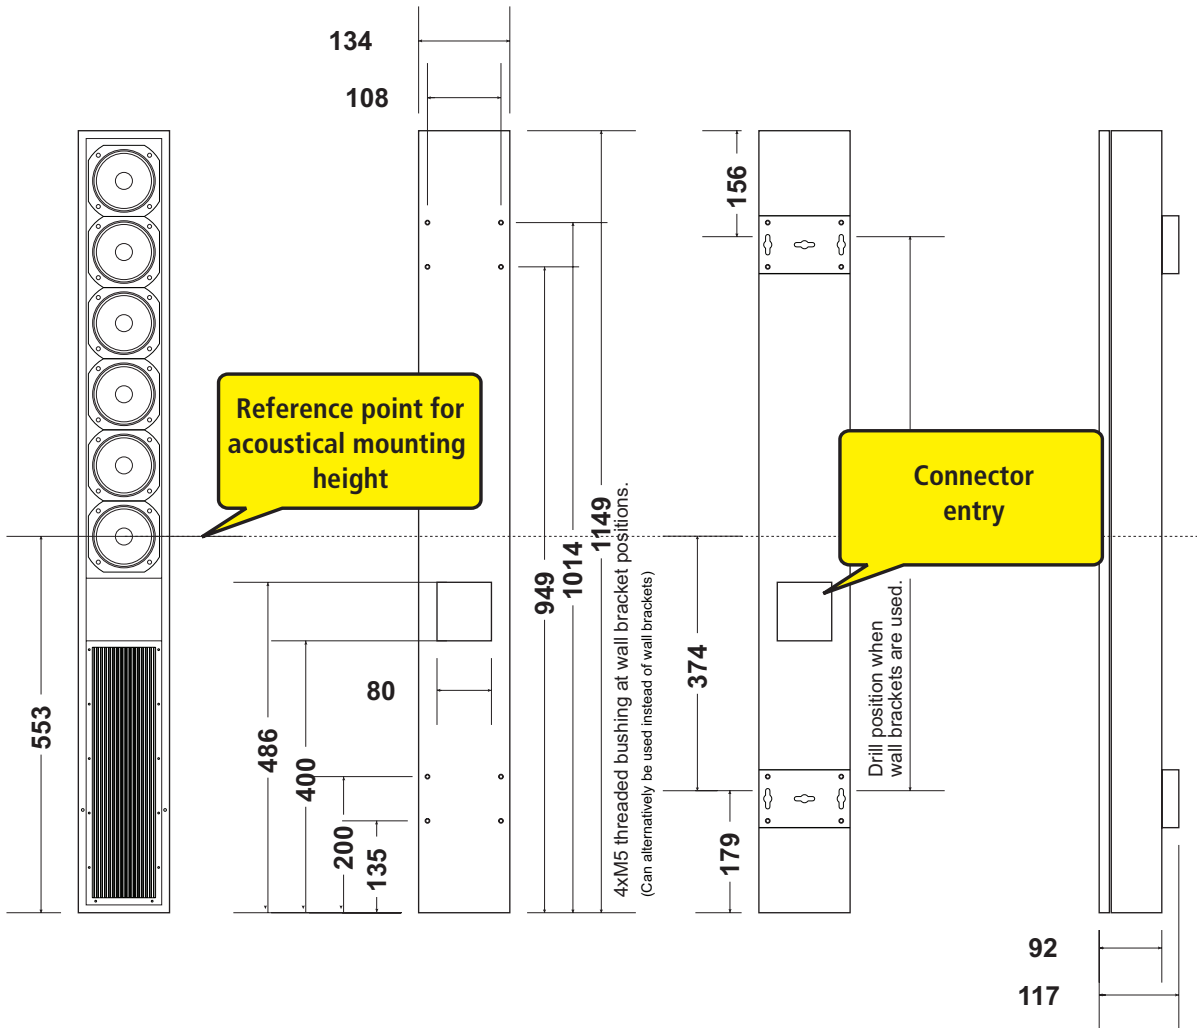

This drawing is valid for the default 'amp-at-bottom' version - part number 585000

### 3. Mechanical Details (part number 585001)

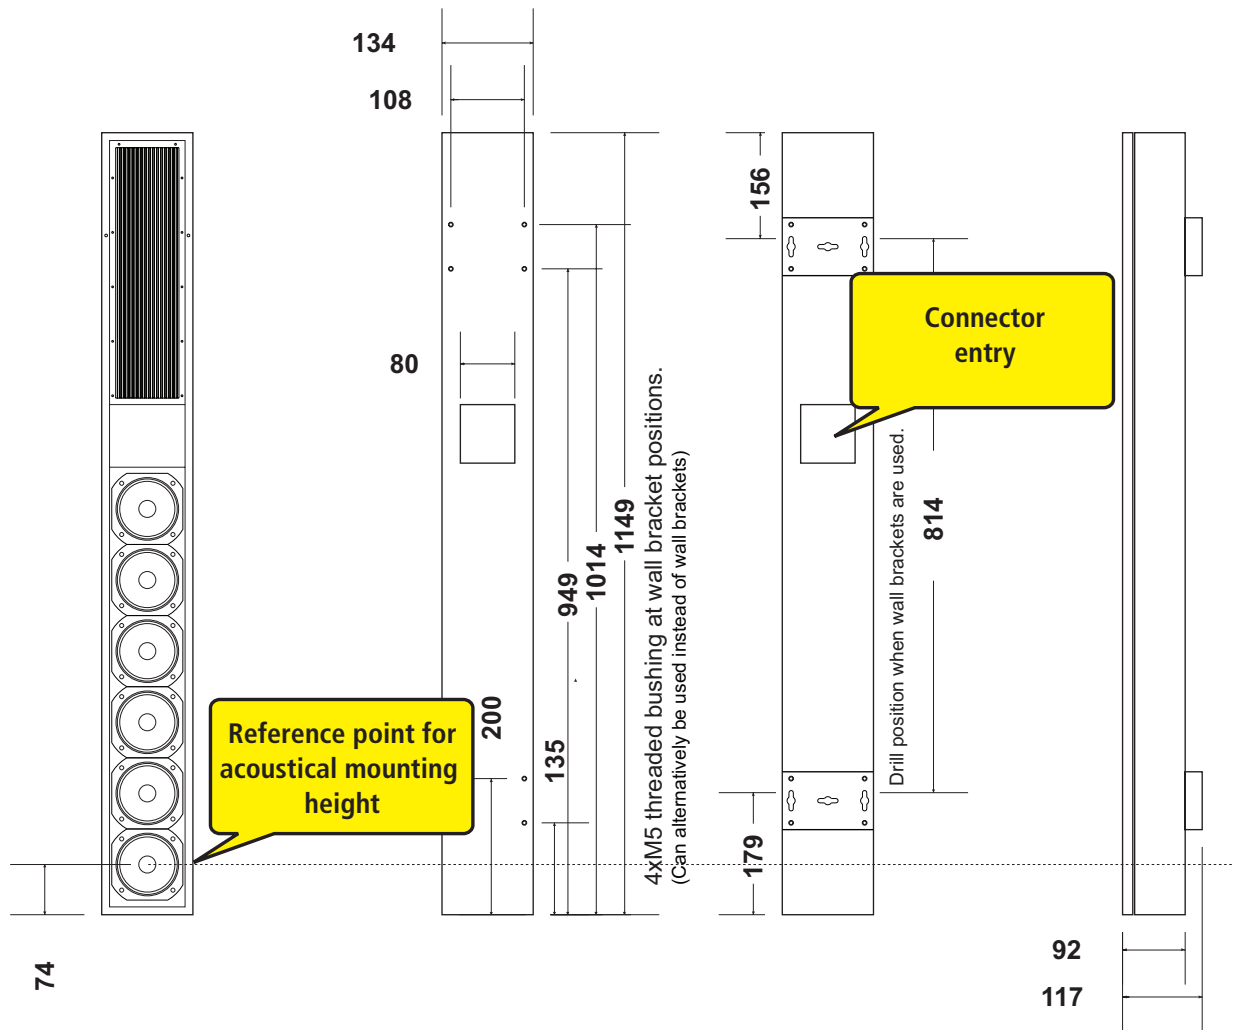

This drawing is valid for the 'amp-at-top' version - part number 585001

## 4. Optional Accessories


### Wall Bracket (25 mm) (Supplied as standard)

Order code: 802225  
(2 pcs incl. fasteners)  
Standard colour RAL 9010




### Wall Bracket (35 mm)

Order code: 802235  
(2 pcs incl. fasteners)  
Standard colour RAL 9010



### Wall Bracket (60 mm)

Order code: 802260  
(2 pcs incl. fasteners)  
Standard colour RAL 9010




### Small Hinge

Order code: 806602  
(2 pcs pack)



### Swivel Bracket 45°

Order code: 806618  
(1 pcs per pack)  
Standard colour RAL 9010




### Swivel Bracket 90°

Order code: 806608  
(1 pcs per pack)  
Standard colour RAL 9010




### Hinge Bracket 90°

Order code: 802000  
(1 pcs per pack)  
Standard colour RAL 9010




### Cover Plate

2x PG13.5 holes for cable gland  
Order code: 802110  
Standard colour RAL 9010




### Cover Box 42 mm

2x16mm holes for cable gland  
Order code: 802105  
Standard colour RAL 9010




### Cover Box 58 mm

2x25mm holes for cable gland  
Order code: 802100  
Standard colour RAL 9010




### Cover Box 42 mm

(6 x XLR)  
Order code:  
191810043 (pre-punched box)  
802120 (pre-assembled)  
Standard colour RAL 9010




### Ambient Noise Microphone

and Temperature Sensor  
Order code: 97661101



## 5. DSP Block Diagram

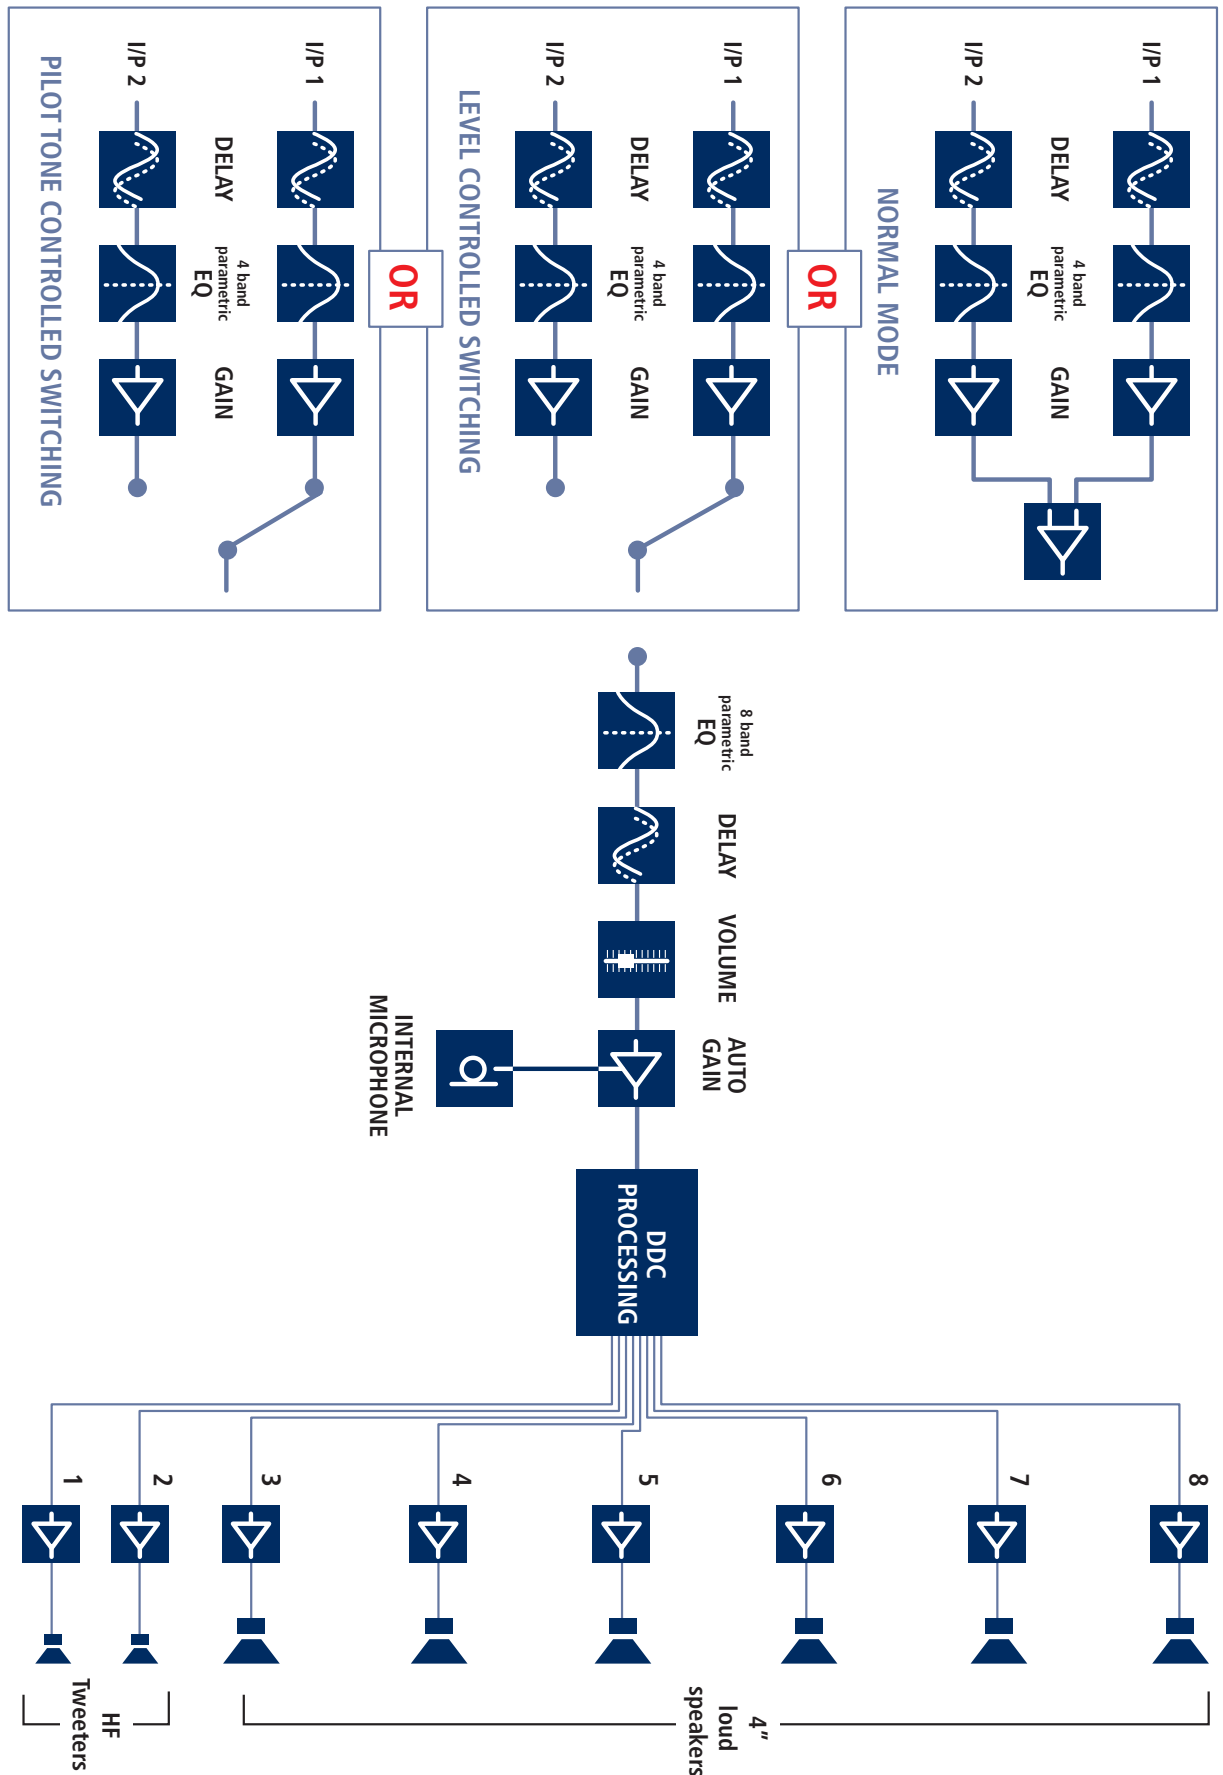



IS A REGISTERED TRADE MARK OF

**DURAN AUDIO BV**

Koxkampseweg 10, 5301 KK Zaltbommel, The Netherlands.

tel. +31 418 515583 fax. +31 418 518077

<http://www.duran-audio.com> [Info@duran-audio.com](mailto:Info@duran-audio.com)